




***CENTURION GUARD® / DRIVE DISABLER TRAY™  
INSTALLATION GUIDE***



# PACKAGE COMPONENTS

Below is a list of each component included in the package.

1. Keys
2. Power Cable
3. Floppy Cable
4. Centurion Guard / Drive Disabler Tray

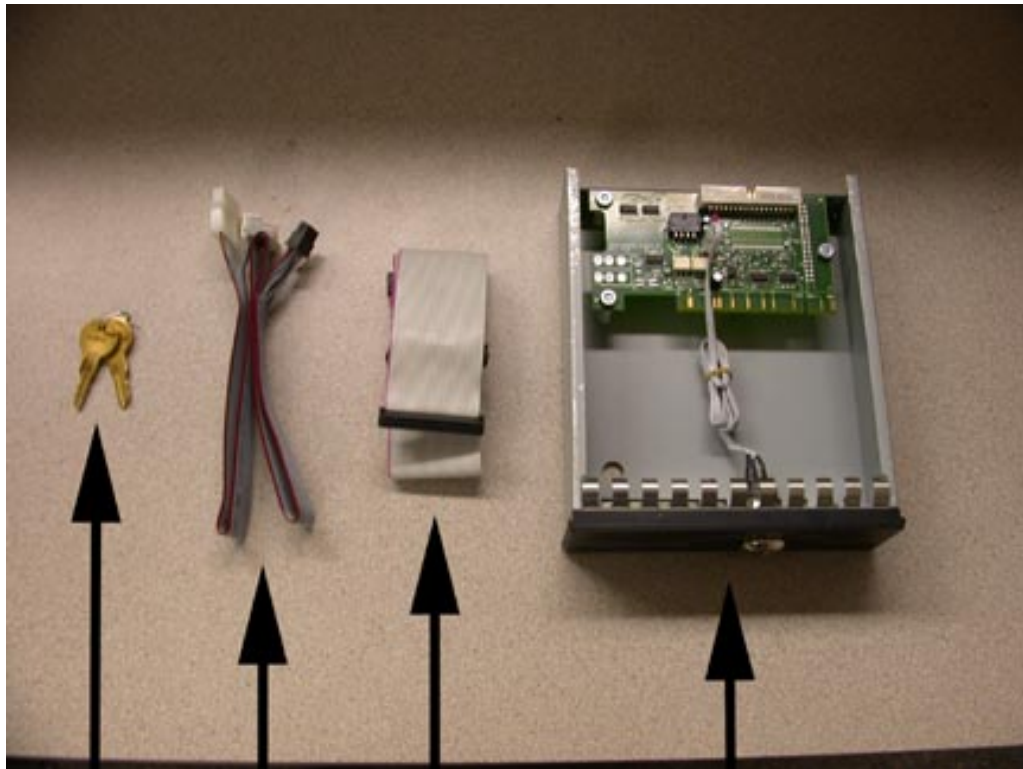

1

2

3

4

# HARDWARE INSTALLATION

**Step 1.** Locate an available 5 1/4" drive bay. (Figure 1)



Figure 1

**Step 2.** Slide Centurion Guard / Drive Disabler tray into the available 5 1/4" drive bay. (Figure 2)



Figure 2



Figure 3

## HARDWARE INSTALLATION CONTINUED

**Step 4.** Attach the floppy cable to the Centurion Guard / Drive Disabler tray using the open (center) 34-pin floppy connector on the cable. (Figure 4a & 4b)


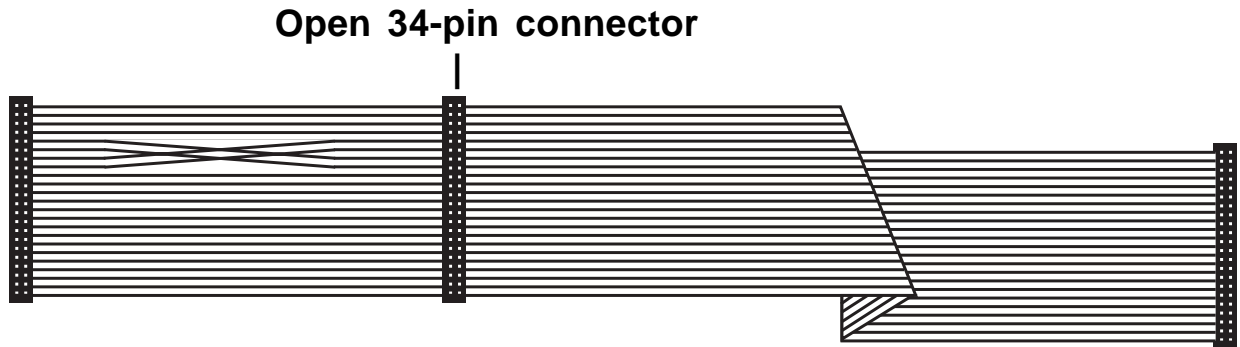


Figure 4a

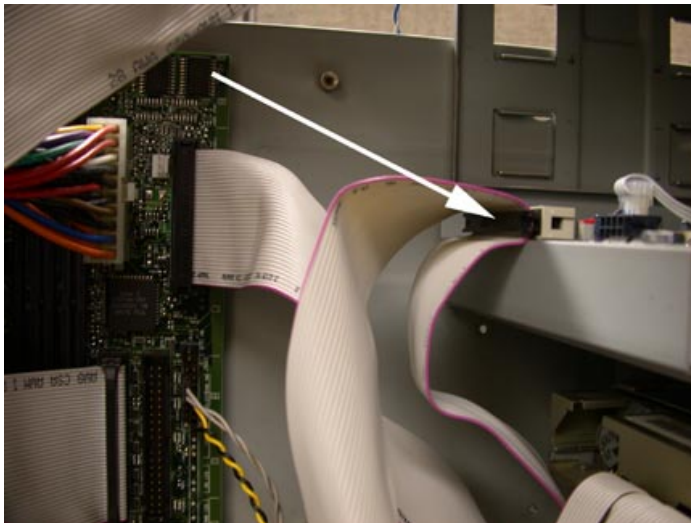

Note: If your existing floppy cable does not have an extra 34-pin connector you should have been supplied with a cable that does.

Figure 4b

**Step 5.** Attach the black connector of the supplied power cable to the Centurion Guard / Drive Disabler tray. Figure 5

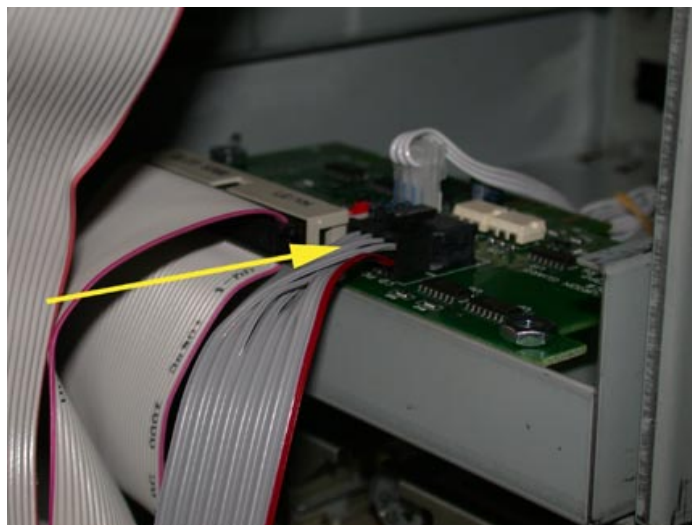


Figure 5

## HARDWARE INSTALLATION CONTINUED

**Step 6.** Attach the power connector to the device that will be disabled by Drive Disabler. For example CD-ROM drive, DVD-ROM driver, hard drive, etc.



Figure 6

**Step 7.** Attach an available power supply connector to the power connector on the Centurion Guard / Drive Disabler tray. Figure 7.

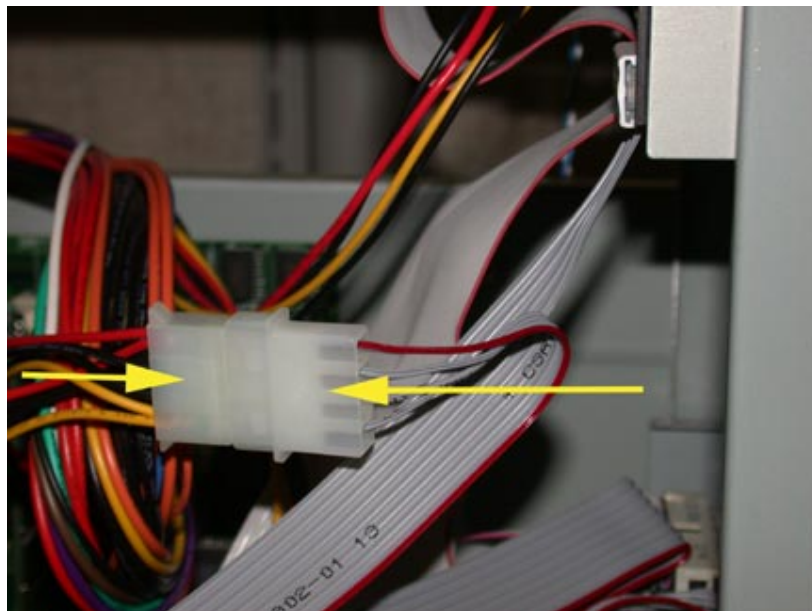



Figure 7

# SOFTWARE INSTALLATION

Begin the Centurion Guard software installation by setting the computer configuration to the default conditions you wish to use. This includes installing any software applications that will be used on the system.

Continue by following the steps below:

1. Insert the installation disk into the 3.5” disk drive and open My Computer.
2. Open the drive that contains the installation disk and double-click the Install icon.
3. Either select the default storage space or select a different size by dragging the slider bar or typing in the text box.
4. After you have selected the desired storage space click the **Install** button.

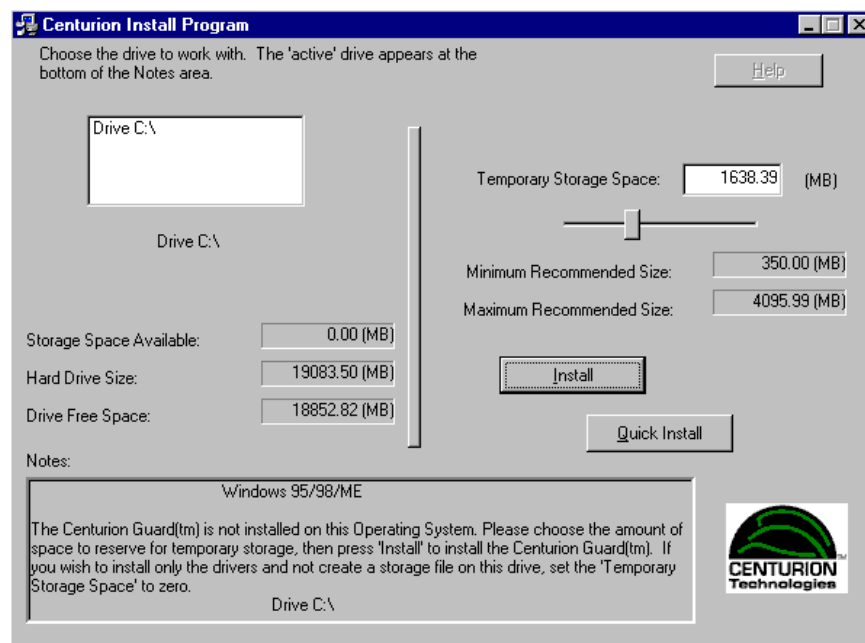


Note: Selecting the **Quick Install** button will skip step 5 and create a storage file on every drive protecting all drives.


# SOFTWARE INSTALLATION CONTINUED

5. You will be asked to choose to either protect “All” drives or the current “Active” drive. Choosing **Yes** will create a storage area on each drive indicated in the “Drive Window.” Selecting **No** will create a storage area on only the Active drive appearing in the notes area at the bottom of the window.


Note: The Temporary Storage Area creation process may take several minutes.

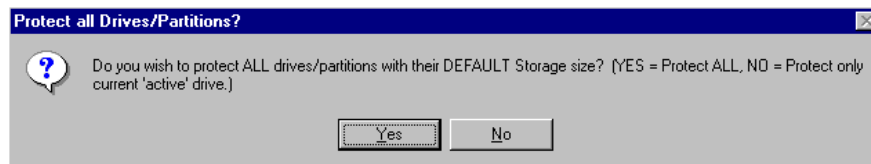


6. Please remember to change the boot sequence in the BIOS to boot from the hard drive as the first boot device. Select **OK** to continue.

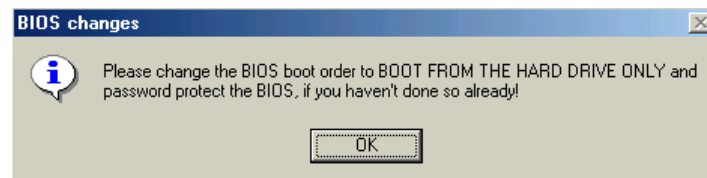


7. The process is now complete. It is necessary to reboot for the changes to take effect. Select **Yes** to reboot now or **No** to reboot later.

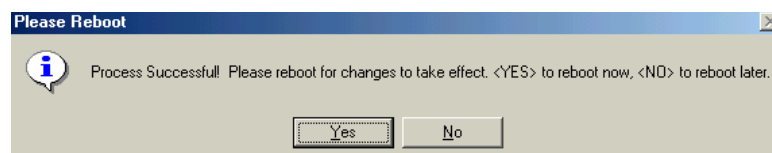

8. Select **Yes** to confirm the reboot or **No** to cancel.

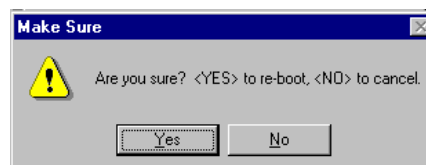

# CENTURION GUARD / DRIVE DISABLER OPTIONS

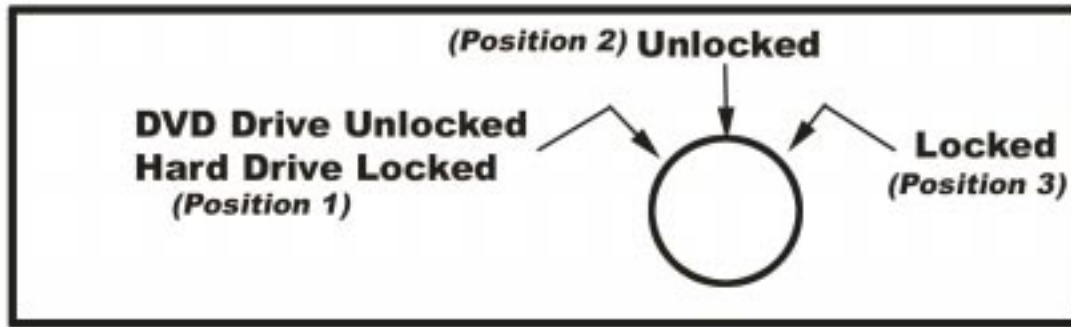

## Options:

1. **Position 1** - Power down the PC and turn the key to *Position 1* to lock the hard drive with the DVD drive unlocked. Power up the PC.
2. **Position 2** - Power down the PC and turn the key to *Position 2* to unlock both the hard drive and DVD drive. Power up the PC.
3. **Position 3** - Power down the PC and turn the key to *Position 3* to lock both the hard drive and DVD drive. Power up the PC.

**Note:** Power down the PC by shutting down Windows®. If necessary, press the PC's power button after Windows has shut down. Power up the PC by pressing the PC's power button.



All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Centurion Technologies, Inc. Centurion Technologies, Inc. shall not be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by purchaser or third parties as a result of: accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product.

General Notice: Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Centurion Technologies, Inc. disclaims any and all rights in those marks.



Centurion Technologies, Inc.  
512 Rudder Road  
Fenton, MO 63126  
800.224.7977 Sales  
888.265.6055 Technical Support